


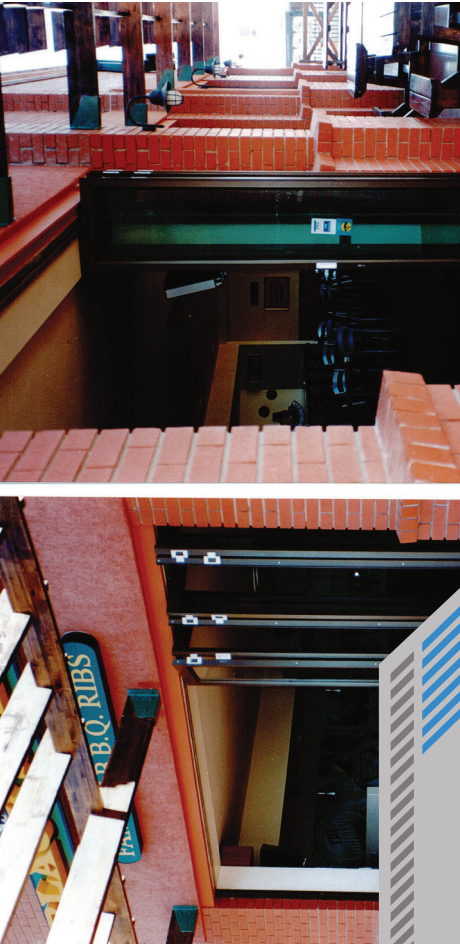

Centafold 100

Top hung sliding hardware for interior aluminium and timber doors.

Features

- Strong aluminium top track
- Centre hung leaves
- Quality proven hardware

Specifications

Max door mass: 100kg
 Max door height: 2700mm
 Max door width: 1200mm
 Door thickness: 44mm
 Max 7½ leaves hinged together and to pivot

The area of a single sliding leaf should be related to all other factors.

For specialist projects contact:



South Africa: +27 11 626 1001
 www.hillaladam.com


Sliding / folding door systems
 (Domestic, Commercial, Shop fitting, Hospital, Industrial)

Components

- 400P Pivot set
- 400TA Aluminium top track
- 400TPT/TPA Hangers
- 19A Aluminium or 19B brass guide channel
- 40/19N Bottom guide
- 443B Brass or 443A Aluminium hinges
- 868x1 Aluminium door or 866x1 timber door hinge
- VSKH Aluminium door or 86SKH timber door hinge handle
- 503NA/GA Flush pull handle
- 452 Holdback catch
- 488x150 Flush bolt (timber doors)
- 477LF Single or 477FR Double throw flush bolt
- 970 Deadbolt lock (timber doors)

NOTE:

- When pivot sets are replaced by hinges, particular attention should be paid by the joiner or aluminium fabricator to leaf sizes.
- All fittings available in stainless steel for all coastal applications.
- Various finishes available.

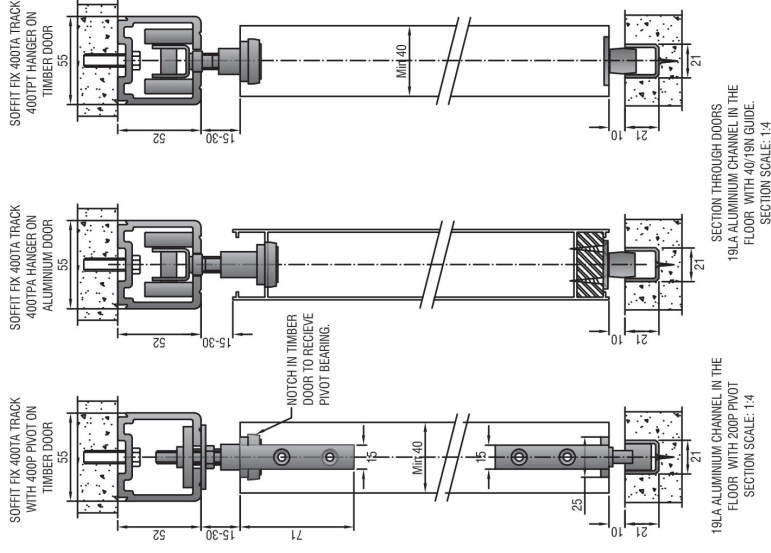

19A ALUMINIUM CHANNEL IN THE FLOOR WITH 200P PIVOT
 SECTION SCALE: 1:4

SECTION THROUGH DOORS
 19A ALUMINIUM CHANNEL IN THE FLOOR WITH 40/19N GUIDE.
 SECTION SCALE: 1:4

400TPA / 400TPT
 HANGER

40/19N GUIDE

200P PIVOT SET

Mechanism



