



CentaFold 50

Top hung sliding hardware for interior aluminium and timber doors.

Features

- Strong aluminium top track
- Centre hung leaves
- Quality proven hardware

Specifications

Max door mass: 50kg
 Max door height: 2400mm
 Max door width: 1000mm
 Door thickness: 44mm
 Max 7½ leaves hinged together and to pivot

The area of a single sliding leaf should be related to all other factors.

Components

- 200P Pivot set
- 200TA Aluminium top track
- 200TPT/TPA Hangers
- 19A Aluminium or 19B brass guide channel
- 40/19N Bottom guide
- 443B Brass or 443A Aluminium hinges
- 868x1 Aluminium door or 866x1 timber door hinge
- VSKH Aluminium door or 866SKH timber door hinge handle
- 503NA/GA Flush pull handle
- 452 Holdback catch
- 488x150 flush bolt (timber doors)
- 477LF Single or 477FR double throw flush bolt (aluminium doors)
- 970 Deadbolt lock (timber doors)

NOTE:


- When pivot sets are replaced by hinges, particular attention should be paid by the joiner or aluminium fabricator to leaf sizes.
- All fittings available in stainless steel for all coastal applications.
- Various finishes available.

For specialist projects contact:



South Africa: +27 11 626 1001
 www.hillalodam.com

Sliding / folding door systems
 (Domestic, Commercial, Shop fitting, Hospital, Industrial)

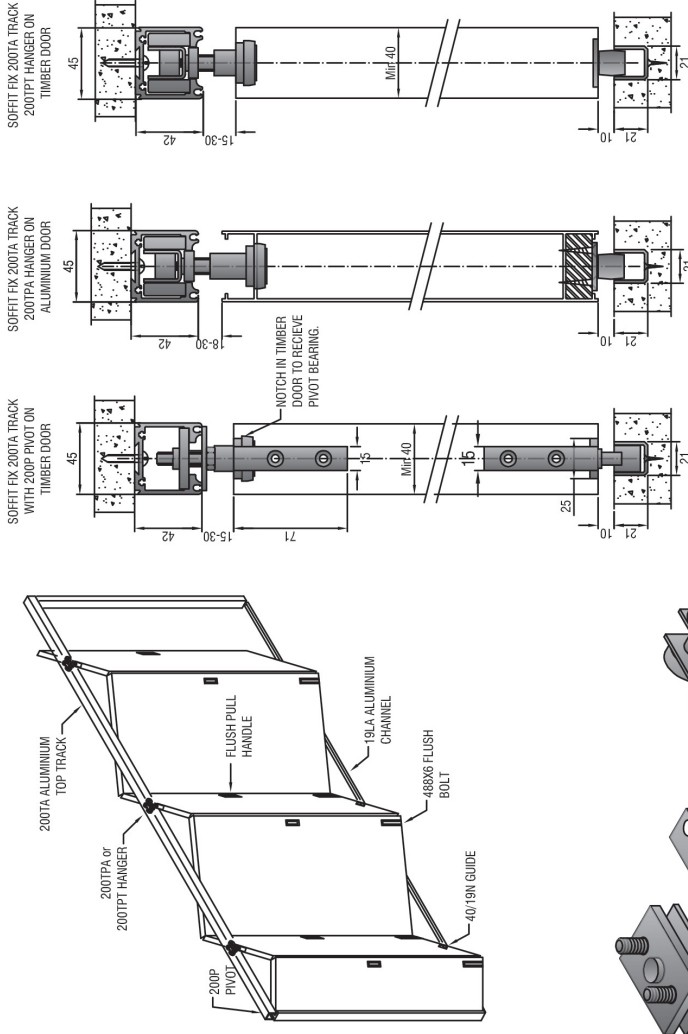

19A ALUMINIUM CHANNEL IN THE FLOOR WITH 200P PIVOT
 SECTION SCALE: 1:4

SECTION THROUGH DOORS
 19A ALUMINIUM CHANNEL IN THE FLOOR WITH 40/19N GUIDE
 SECTION SCALE: 1:4

