



Foldaside 60

Top hung sliding and folding hardware for interior aluminium and timber doors.

Features

- Strong aluminium top track
- End hung leaves
- Quality proven hardware
- End pivot for equal leaves

Specifications

Max leaf mass: 60kg
 Max leaf height: 2700mm
 Max leaf width: 900mm
 Leaf thickness: 44mm
 Max 5 leaves hinged together, folding either way.

The area of a single sliding leaf should be related to all other factors.

For specialist projects contact:



South Africa: +27 11 626 1001
 www.hillalodam.com


Sliding / folding door systems
 (Domestic, Commercial, Shop fitting, Hospital, Industrial)

Components

- 400P Pivot set
- 400TA Aluminium top track
- 400FT/400FA Hangers
- 19A Aluminium or 19B brass guide channel
- 400/19N Bottom guide
- 443B Brass or 443A aluminium hinges
- 868X1 Aluminium door or 866X1 timber door hinge
- VSKH Aluminium door or 86SKH timber door hinge handle
- 503NA/GA Flush pull handle
- 452 Holdback catch
- 455 Roller catch
- 488X150 Flush bolt (timber doors)
- 477LF Single or 477FR Double throw flush bolt (aluminium doors)
- 970 Deadbolt lock (timber doors)

NOTE:


- When pivot sets are replaced by hinges, particular attention should be paid by the joiner or aluminium fabricator to leaf sizes.
- All fittings available in stainless steel for all coastal applications.
- Various finishes available.

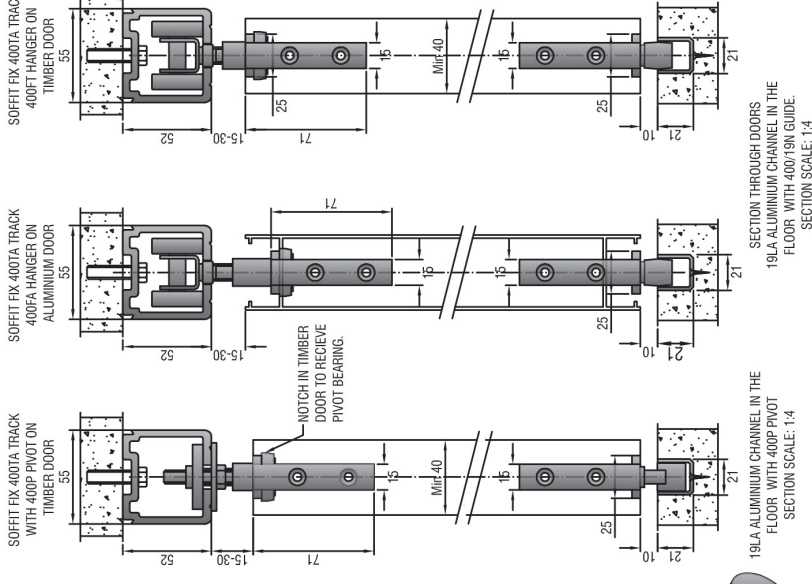







Mechanism

19A ALUMINIUM CHANNEL IN THE FLOOR WITH 400P PIVOT
 SECTION SCALE: 1:4

SECTION THROUGH DOORS
 19A ALUMINIUM CHANNEL IN THE FLOOR WITH 400/19N GUIDE.
 SECTION SCALE: 1:4

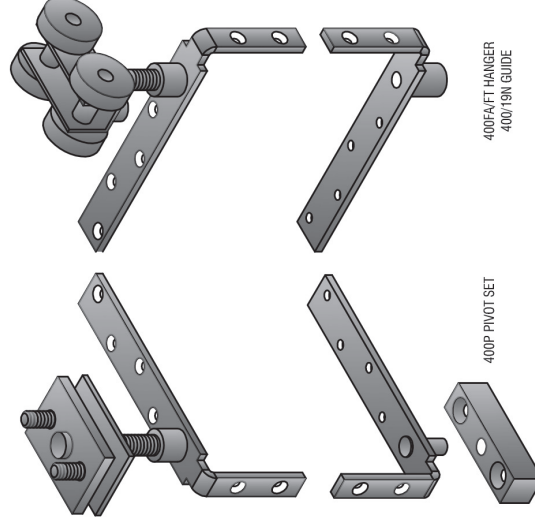

B	DOM	COM	S/FT	HOS	HOT	SF 2.1
---	-----	-----	------	-----	-----	--------

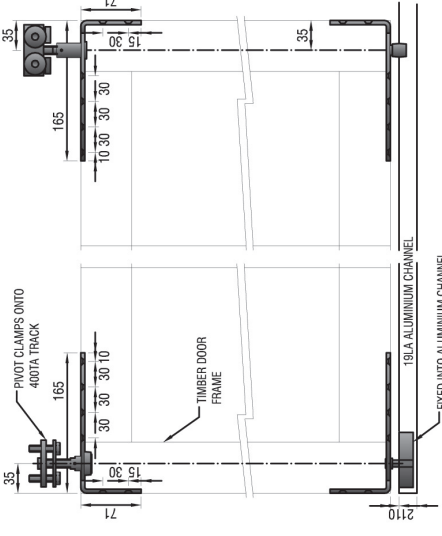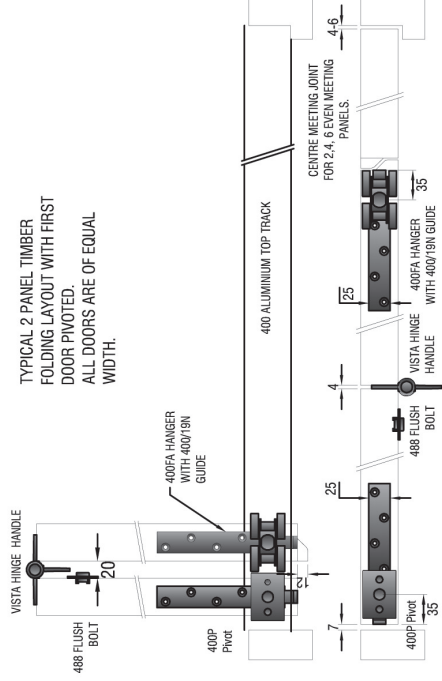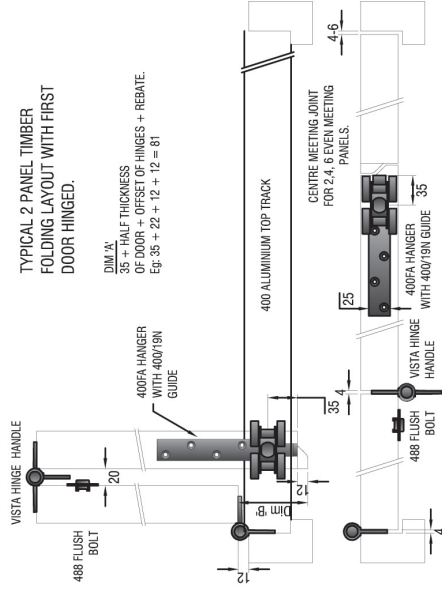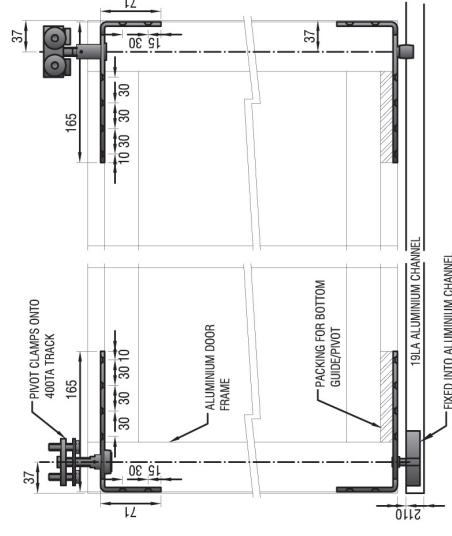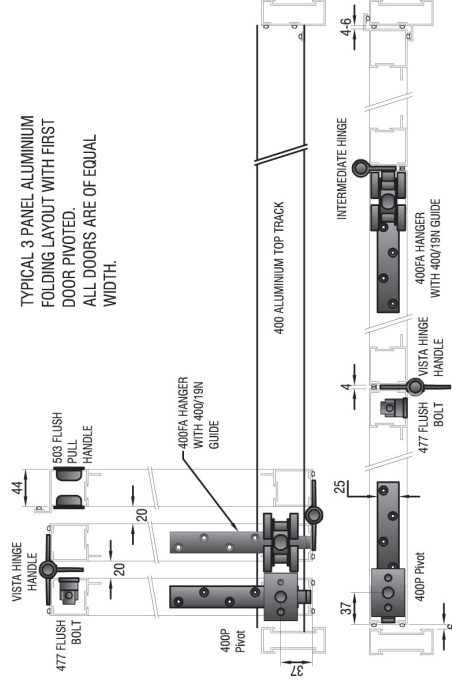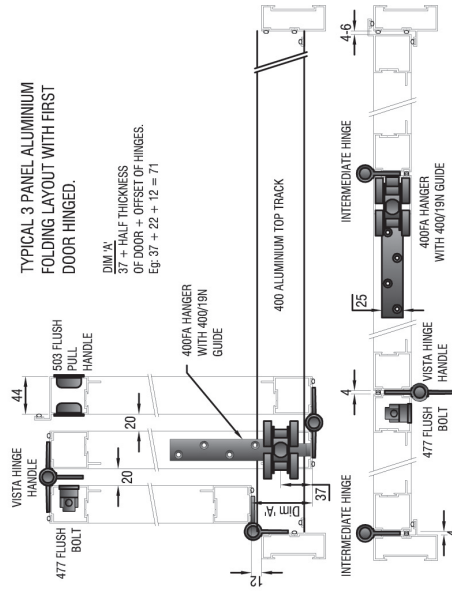

B	DOM	COM	S/FT	HOS	HOT	SF 2.2
---	-----	-----	------	-----	-----	--------

