



Rollaway 1000

Bottom rolling sliding hardware for steel and timber doors up to 1000kg.

Features

- Quality ball-bearing rollers
- Flat groove rollers for strength

Specifications

Max door mass: 1000kg
 Max door height: 5000mm
 Max door width: 4000mm
 Door thickness: 65mm
 FOR EXPOSED DOORS,
 CONSIDER WIND PRESSURE.
 Max door surface area: 20 sq.m.

Components

- A417S (side) or R417S (top) brackets
- max 900mm centres
- 417S Steel guide channel
- 0846 Top guide
- 0832 Bottom rollers
- 5020 Steel bottom track
- 1S Drop bolt
- 49 Door stop
- 210 Grab handle

The area of a single sliding leaf should be related to all other factors.

For specialist projects contact:




South Africa: +27 11 626 1001
 www.hillaldam.com

Straight sliding door systems
 (Domestic, Commercial, Shop fitting, Hospital, Industrial)

SECTION THROUGH DOOR SHOWING
 417S STEEL CHANNEL WITH R417 BRACKET
 AND 0846 GUIDE



SECTION THROUGH DOOR SHOWING
 417S STEEL CHANNEL WITH R417 BRACKET
 AND 0846 GUIDE

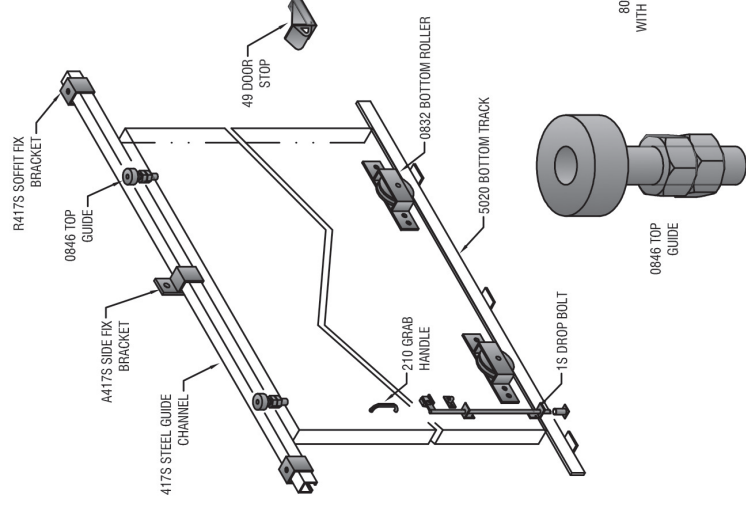

SECTION THROUGH DOOR SHOWING
 ALTERNATE CILL DETAILS OF 0832 BOTTOM ROLLER
 WITH RAISED AND RECESSED 5012 STEEL TRACK
 SCALE 1:5



Mechanism

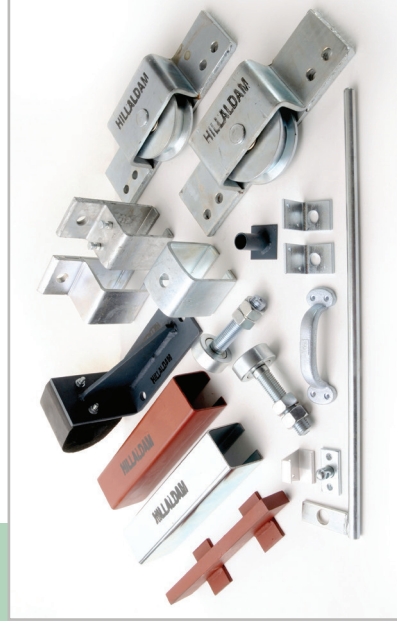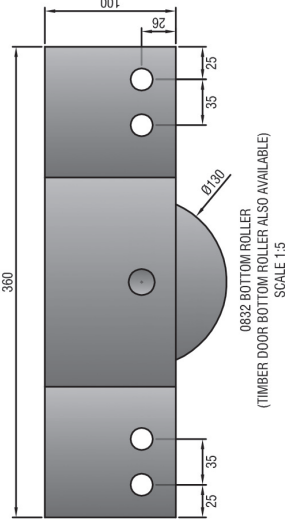

B

IND

ST 35.0