



Foldaside 90

Top hung sliding and folding hardware for interior and exterior aluminium and timber doors.

Features

- Strong aluminium top track
- End hung doors
- Quality proven hardware
- End pivot for equal doors

Specifications

Max leaf mass: 90kg
 Max leaf height: 3500mm
 Max leaf width: 9000mm
 Leaf thickness: Min 44mm
 Max 5 leaves hinged together with pivot

Note: When pivot sets are replaced by hinges, particular attention should be paid by the joiner or aluminium fabricator to leaf sizes.

The area of a single sliding leaf should be related to all other factors.

For specialist projects contact:



South Africa: +27 11 626 1001
 www.hillalodam.com

Components

- 600P Pivot set
- 600TA Aluminium top track
- 600FA Hangers
- 19LA Aluminium or 19B brass guide channel
- 600/19N Bottom guide
- 443B Brass or 443A aluminium hinges
- 868x1 Aluminium door or 866x1 timber door hinge
- VSKH Aluminium door or 86SKH timber door hinge handle
- 503NA/GA Flush pull handle
- 452 Holdback catch
- 455 Roller catch
- 488x150 Flush bolt (timber doors)
- 477LF Single or 477FR double throw flush bolt (aluminium doors)
- 970 Deadbolt lock (timber doors)


NOTE:

- When pivot sets are replaced by hinges, particular attention should be paid by the joiner or aluminium fabricator to leaf sizes.
- All fittings available in stainless steel for coastal applications.
- Various finishes available.



Sliding / folding door systems

(Domestic, Commercial, Shop fitting, Hospital, Industrial)



SECTION THROUGH DOOR SHOWING
 SOFET FIX 600TA TRACK WITH TOP
 SUSPENSION BRACKET AND 600P PIVOT

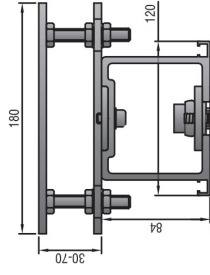



SECTION THROUGH DOORS SHOWING
 SOFET FIX 600TA TRACK WITH TOP
 SUSPENSION BRACKET AND 600FA HANGER

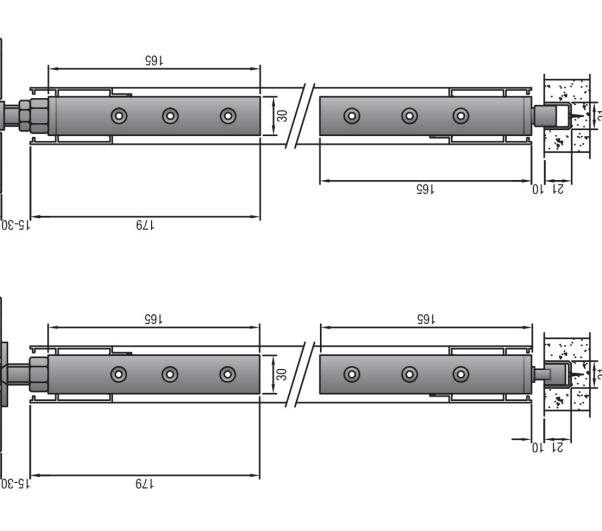

SECTION THROUGH DOORS SHOWING
 600P PIVOT SET IN 19LA ALUMINIUM
 CHANNEL ON ALUMINIUM DOOR
 SCALE 1:5



Mechanism

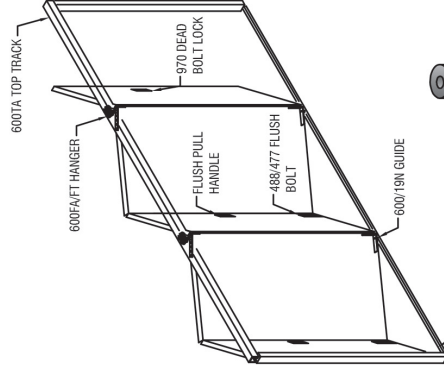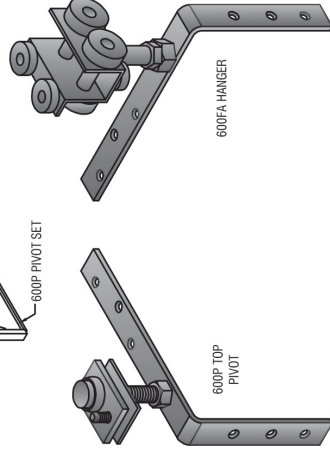

T

COM

S/FT

SF 4.1

