



Multifold 30E

Top hung, end folding hardware for interior timber or aluminium doors.

Features

- Galvanised or stainless steel ball-bearing hangers
- Equal width door leaves
- For doors or serving hatches

Specifications

Max leaf mass: 30kg
 Max leaf height: 2400mm
 Max leaf width: 600mm
 Leaf thickness: 32-44mm
 Recommended: 2 or 4 leaves hinged together and to an end pivot. For 2 leaves, bottom guiding is optional. For 4 leaves, bottom guiding is recommended. No swing leaves.

The area of a single sliding leaf should be related to all other factors.

Components

- 100S Steel or 100A aluminium top track
- 100MF Hangers
- 40/21N Guides
- 21A Aluminium channel
- MF Pivot set
- 503NA/GA Flush pull handle
- 442S or 442B Butt hinged
- 452 Holdback catch
- 455 Roller catch
- 488x150mm Flush bolt

NOTE:


- All fittings available in stainless steel for all coastal applications
- Various finishes available.

For specialist projects contact:



South Africa: +27 11 626 1001
 www.hillaldam.com

Sliding / folding door systems
 (Domestic, Commercial, Shop fitting, Hospital, Industrial)

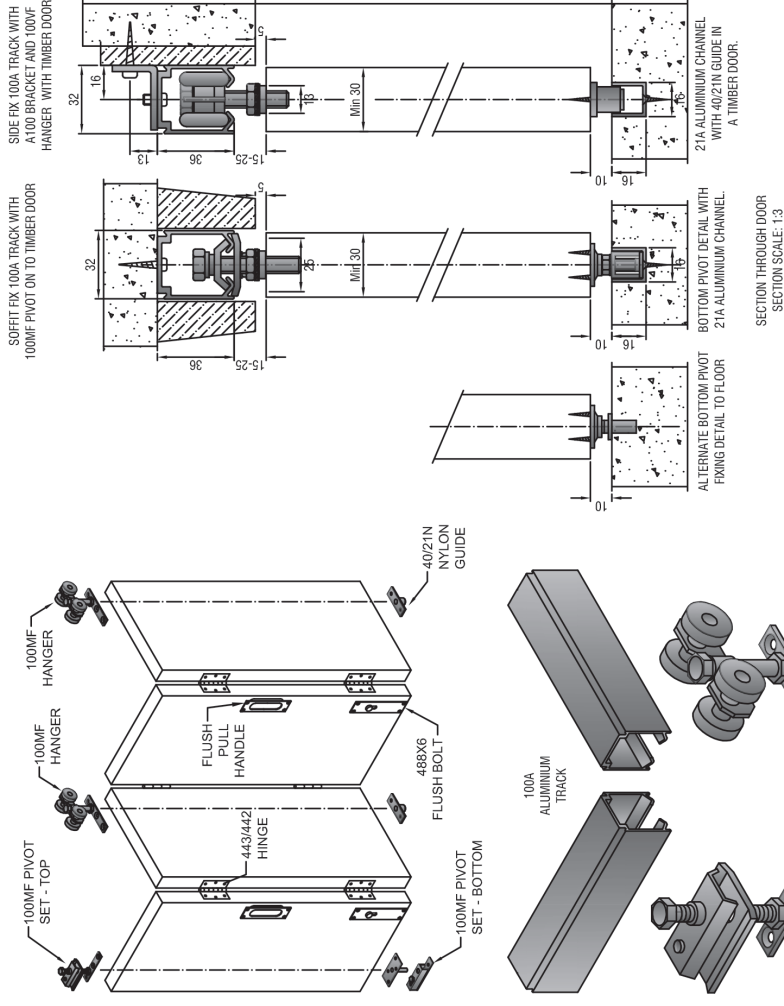

Mechanism




T DOM

S/FT

HOS

HOT

SF 14.1

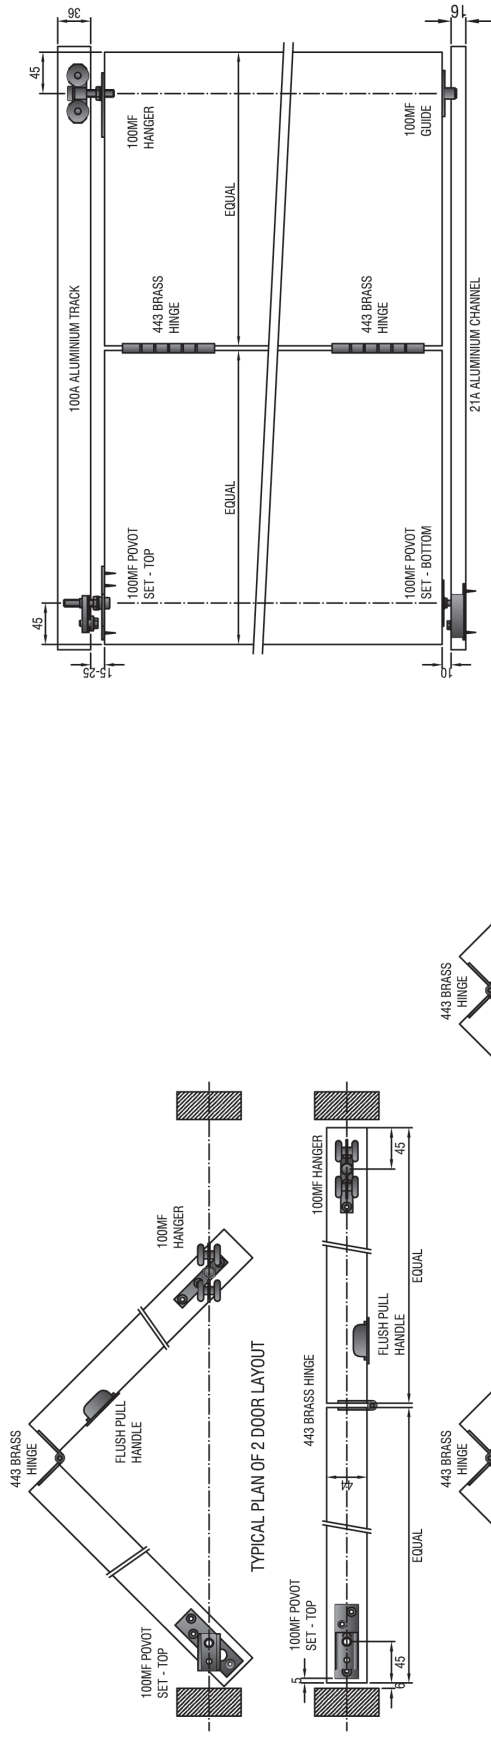

T	DOM	S/FT	HOS	HOT	SF 14.2
---	-----	------	-----	-----	---------

