



Partitionfold 100

Top hung sliding and folding hardware for interior aluminium and timber doors.

Features

- Strong aluminium top track
- Centre hung leaves
- Quality proven hardware
- No floor channel required

Specifications

Max leaf mass: 100kg
 Max leaf height: 3000mm
 Max leaf width: 1200mm
 Leaf thickness: 44mm
 Leaves hinged together in pairs and sliding either way with half-width locking leaf.

The area of a single sliding leaf should be related to all other factors.

For specialist projects contact:



South Africa: +27 11 626 1001
 www.hillaladam.com




Sliding / folding door systems
 (Domestic, Commercial, Shop fitting, Hospital, Industrial)

Components


- 400TA Aluminium top track
- 400TP/A Hanger for aluminium door Or 400TP/T Hanger for timber door
- 443B Brass or 443A aluminium hinges
- 868x1 Aluminium door or 866x1 timber door hinge
- VSKH Aluminium door or 86SKH timber door hinge handle
- 503NA/GA Flush pull handle
- 452 Holdback catch
- 455 Roller catch
- 488x150 Flush bolt (timber door) or 477L Flush bolt (aluminium doors)
- 970 Deadbolt lock (timber door)

NOTE:

- All fittings available in stainless steel for coastal applications.
- Various finishes available.

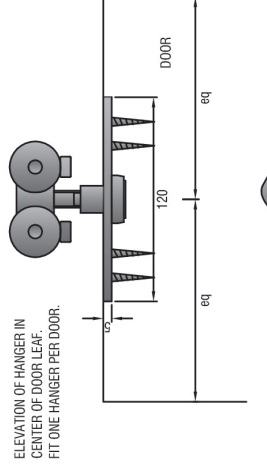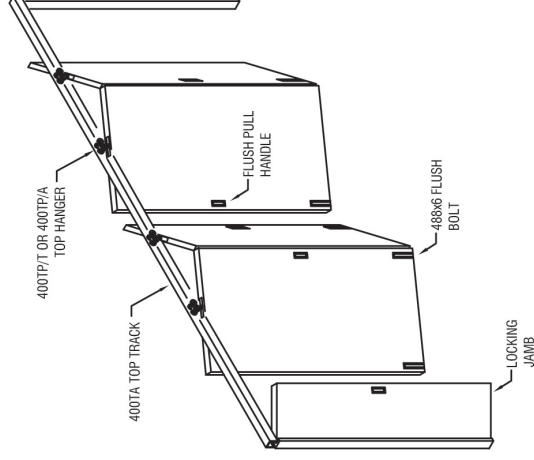


SOFFIT FIX 400TA TRACK WITH 400TP/A HANGER ON ALUMINIUM DOOR

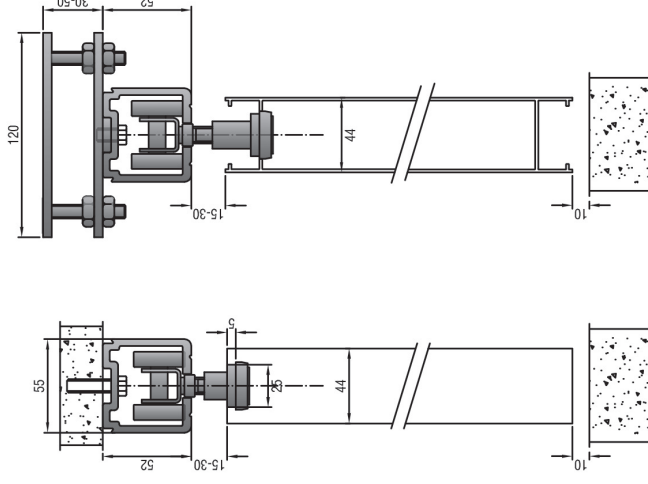

SECTION THROUGH DOORS
 SECTION SCALE: 1:4

Mechanism

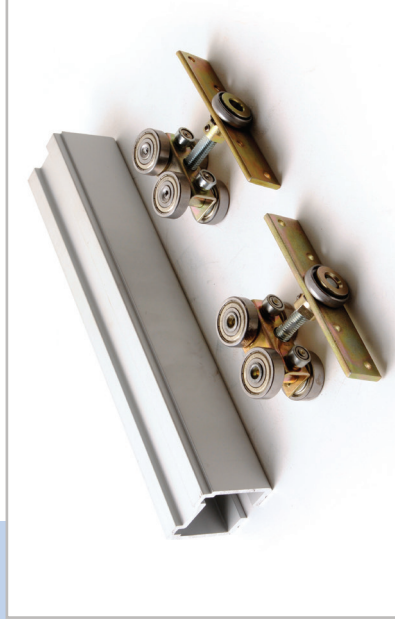

T


COM

S/FT

HOS

HOT

SF 6.1

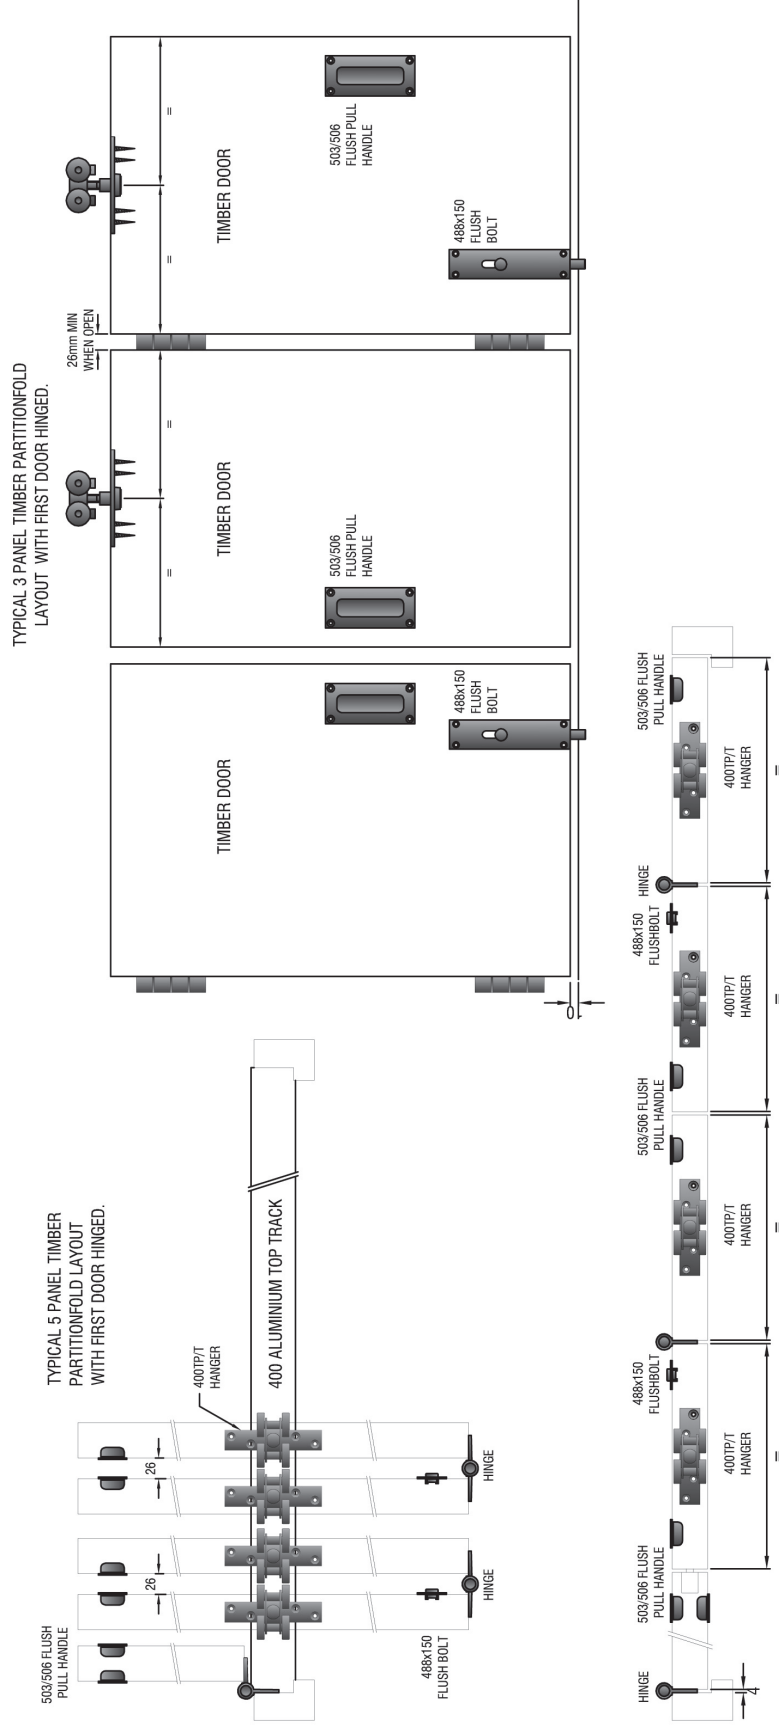

T	COM	S/FT	HOS	HOT	SF 6.2
---	-----	------	-----	-----	--------